



# PONN SUPREME™

## PREMIUM HOSE. OUTSTANDING VALUE.

Supreme is a durable, rugged, traditional double jacket fire hose and one of the best values on the market today. Originally designed over 40 years ago, Supreme has become the hose to which all others are compared. With hose sizes up to 3" and manufactured to exacting standards, our use of ring-spun polyester yarn with a flexible rubber liner and calendered rubber backing, keeps this hose supple when empty and tough when necessary.



## FEATURES


- Premium quality, double jacket, EPDM (Ethylene Propylene Diene Monomer) rubber lined fire hose made from 100% high tensile strength ring-spun polyester yarn. The liner is attached to the inner jacket using a vulcanized calendered rubber backing that mechanically and chemically bonds the EPDM rubber lining to the inside jacket without the use of glues, and provides the assurance that the lining will not delaminate. Calendered backed hoses are more flexible and have a higher heat resistance than other hoses using a Thermoplastic (TPU) adhesive.
- Optional Dura-Cote™ treatment (see page 31 for more information).
- Remains flexible to temperatures as low as -40°F (-40°C) and is resistant to ozone and oxidation.
- Optional color-coded stripe of one contrasting color can be woven into the outer jacket running the full length of the hose for identification purposes.
- Kink resistance exceeds that of lightweight jacketed hose.
- Suitable for use with CAFS and foam solutions.
- Manufactured in accordance with NFPA 1961 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.

## CONSTRUCTION

Polyester Double Jacket EPDM Rubber Inner Liner with Rubber Backing

## TEMPERATURE RANGE

-40°F to 150°F (-40°C to 65°C)

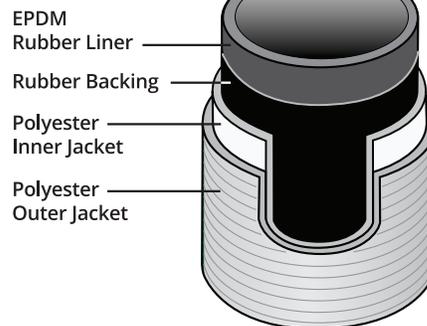


## COUPLINGS

Aluminum NH/NST or IPT Threaded

## HOSE COLORS



## STRIPE COLORS

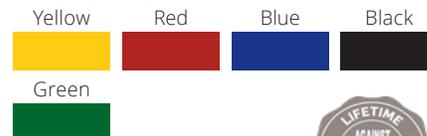



### HOSE SIZING AND SPECIFICATIONS

SIZE	SERVICE TEST	PROOF TEST	BURST	WEIGHT (FOR 50' COUPLED)	FLAT WIDTH	BOWL SIZE
IN	PSI (kPa)	PSI (kPa)	PSI (kPa)	LBS (KG)	IN	IN
1 1/2"	400 (2760)	800 (5515)	1200 (8275)	21 (9.5)	2.80"	1-15/16"
1 3/4"	400 (2760)	800 (5515)	1200 (8275)	24 (10.8)	3.20"	2 - 1/8"
2"	400 (2760)	800 (5515)	1200 (8275)	28 (12.7)	3.68"	2 - 7/16"
2 1/2"	400 (2760)	800 (5515)	1200 (8275)	32 (14.5)	4.50"	3"
3"	400 (2760)	800 (5515)	1200 (8275)	43 (19.5)	5.40"	3 - 9/16"

As per NFPA 1961 - The service test pressure is to be 10% greater than the "normal highest operating pressure" at which the hose is expected to be used.

### HOW TO ORDER

TYPE	HOSE ID	BY	HOSE LENGTH	COLOR	STRIPE COLOR*	COUPLING SIZE	THREAD TYPE	COUPLING MATERIAL
FS	15 = 1 1/2" 17 = 1 3/4" 20 = 2" 25 = 2 1/2" 30 = 3"	X	50 = 50' 100 = 100'	Y = Yellow R = Red B = Blue O = Orange G = Green T = Tan C = White (coated) W = White (uncoated)	Y = Yellow R = Red B = Blue K = Black G = Green Blank = No Stripe	15 = 1 1/2" 20 = 2" 25 = 2 1/2" 30 = 3"	N = NH I = IPT	Aluminum

**Part No. Example: FS17X50YR15N** = FS Supreme Hose, 1 3/4" ID by 50' Length, Yellow with Red Stripe, 1 1/2" NH/NST Aluminum Coupling

\*Choose high contrast stripe color as compared to the selected hose color. Choice may not be available, please verify before ordering.