



NATIONAL DURA-PAK

NYLON DOUBLE JACKET ATTACK HOSE

When introduced, Dura-Pak started an industry-wide trend toward lightweight high-rise hose. Originally designed for back-pack use, Dura-Pak folds tightly for small spaces, hose beds and high-rise packs. Because it is so durable, many departments have selected Dura-Pak for frontline attack duties.

FEATURES:

- Both jackets made from 100% high strength, low stretch, air-entangled nylon 6.6 along with a lining of thermoplastic polyurethane for reduced weight while remaining kink resistant.
- Reverse twill weave of the inner jacket provides a smoother waterway and superior liner system, surpassed only by Ponn Conquest™.
- Standard Dura-Cote™ protective treatment (see page 31 for more information).
- Suitable for CAFS and foam concentrate applications.
- Highly resistant to ozone and oxidation.
- Can be used for potable water in an emergency. The polyurethane lining material meets NSF/ANSI Standard 61 for drinking water.
- Manufactured in accordance with NFPA 1961 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.

CONSTRUCTION

Nylon Double Jacket
Polyurethane Inner Liner

TEMPERATURE RANGE

-40°F to 150°F (-40°C to 65°C)

HOSE SIZING AND SPECIFICATIONS


SIZE	SERVICE TEST	PROOF TEST	BURST	WEIGHT (FOR 50' COUPLED)	FLAT WIDTH	BOWL SIZE
IN	PSI (kPa)	PSI (kPa)	PSI (kPa)	LBS (KG)	IN	IN
1 1/2"	400 (2760)	800 (5515)	1200 (8275)	15 (6.8)	3.0"	1 - 15/16"
1 3/4"	400 (2760)	800 (5515)	1200 (8275)	17 (7.7)	3.5"	2 - 1/8"
2"	400 (2760)	800 (5515)	1200 (8275)	21 (9.5)	3.7"	2 - 1/2"
2 1/2"	400 (2760)	800 (5515)	1200 (8275)	26 (11.8)	4.45"	2 - 15/16"
3"	400 (2760)	800 (5515)	1200 (8275)	32 (14.5)	5.3"	3 - 9/16"

As per NFPA 1961 - The service test pressure is to be 10% greater than the "normal highest operating pressure" at which the hose is expected to be used.

HOW TO ORDER

TYPE	HOSE ID	BY	HOSE LENGTH	COLOR	COUPLING SIZE	THREAD TYPE	COUPLING MATERIAL
DP	15 = 1 1/2" 17 = 1 3/4" 20 = 2" 25 = 2 1/2" 30 = 3"	X	50 = 50' 100 = 100'	Y = Yellow R = Red B = Blue O = Orange G = Green T = Tan C = White (coated)	15 = 1 1/2" 20 = 2" 25 = 2 1/2" 30 = 3"	N = NH I = IPT	Aluminum

Part No. Example: DP17X50O15N = DP Dura-Pak Hose, 1 3/4" ID by 50' Length, Orange, 1 1/2" NH/NST Aluminum Coupling

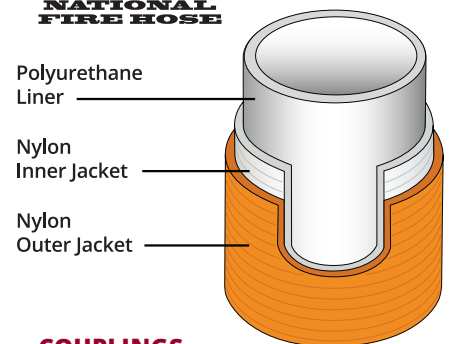

COUPLINGS

Aluminum NH/NST or IPT Threaded

COLORS

